



Key Features

- IEEE 802.11 b/g/n compliant
- Up to 300Mbps (2.4GHz)
- 24V Proprietary PoE support
- Detachable 2.4GHz 5dBi omni antennas
- AP/CB/CR/WDS/Repeater Modes
- Multi-SSIDs with VLAN tagged
- VLAN tag pass-through via the WDS BR mode
- Web Configuration and EZ controller software
- SNMP V1/ V2c/V3, MIB I/II supported
- WEP/WPA/WPA2 wireless encryption
- IPv4/IPv6 support
- Effective and flexible bandwidth management

802.11b/g/n Long Range Wireless Outdoor AP/CB

EnGenius Outdoor Long Range CPE designs High Power, High Sensitivity and Strong Reliability Solutions under Harsh Environment.

ENS202EXT engineered with the powerful independent RF interface that offers bandwidth up to 300Mbps on 2.4GHz band for accommodating heavy traffic services. The high-efficient 5dBi Omni-directional antenna provides an optimal, widely, extended real outdoor throughput performance in long range distances.


Multiple Operation Modes

Besides the current operating modes on the **Access Point, Client Bridge, Client Router** and **WDS Modes**, EnGenius configured the **Repeater** mode and the **AP function under the CR mode** for achieving the greater coverage, reducing the maintenance fee and flexible application for the various environment.

Effective Management

ENS202EXT integrated with Network Management Software “EZ controller” can offer variety uses in constructing scalable wireless network of all possible application and also allow centralized management via user-interface. ENS202EXT provides wide-range of authentication and encryption standards (including WEP, WPA, WPA2, TKIP/AES and IEEE 802.1X) to enforce the maximum security. Along with Proprietary PoE support excellent long-range network installation when used in conjunction with its outdoor family – ENH220EXT, ENH710EXT and ENH900EXT.

Antennas and Physical Interface

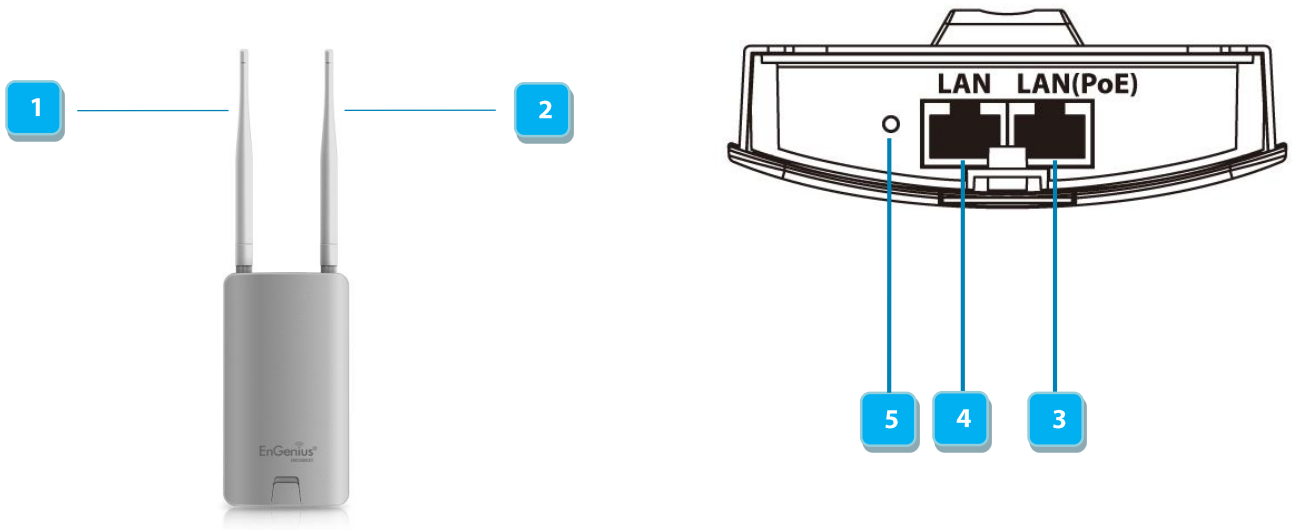

SMA Connector		Physical Interface	
1	2	3	Fast Ethernet Port with PoE Input
		4	Fast Ethernet Port
		5	Reset Button

Specification

Wireless Radio Specification

- 2.4GHz 802.11b/g/n
 - Max 300Mbps
- Transmit Power (Maximum Value)
 - 2.4GHz: Max 26dBm
 - Maximum power is limited by regulatory power
- Supported radio technologies:
 - 802.11b: Direct-sequence spread-spectrum(DSSS)
 - 802.11n: Orthogonal frequency-division multiplexing (OFDM)
 - 802.11n with 20/40 MHz channel width
 - 802.11b/g with 20 MHz channel
- Supported modulation types:
 - 802.11b: BPSK, QPSK, CCK
 - 802.11n: BPSK, QPSK, 16-QAM, 64-QAM
- Supported data rates (Mbps):
 - 802.11b: 1, 2, 5.5, 11
 - 802.11g: 6, 9, 12, 18, 36, 48, 54
 - 802.11n: 6.5 to 300 (MCS0 to MCS15)

Power

- Power Source:
 - 24V Proprietary compliant source
 - Active Ethernet (Power over Ethernet, PoE)
- Power Consumption:
 - Maximum 7.2W

Antennas

- Two detachable high gain antennas
 - Detachable 5dBi 2.4GHz antennas
- Omni-Directional type
 - Provide the optimal coverage
- Compliant with SMA type connector

Interface

- Two 10/100 BASE-T Ethernet Port
 - One port supports 24V proprietary PoE input
 - One port supports the extension of internet signal
- One reset button

Mechanical & Environment

Dimensions / Weight

- 186mm (L) x 100mm (W) x 29mm (H)
- 300g
- Unit, without mounting kit and antennas
- Operating:
 - Temperature: -20°C~70°C
 - Humidity: 0%~90% typical
- Operating:
 - Temperature: -20°C~70°C
 - Humidity: 0%~90% typical
- Storage:
 - Temperature: -30°C~80°C

- Harsh Environment Use:
 - IP65 rated

Operation Mode

- Access Point / Client Bridge / Client Router / WDS / Repeater:
 - A variety of operation modes to serve multiple constituencies and applications.
 - Enable the AP function under the CR mode for flexible application

Easy to Management

- Auto Channel Selection
 - Setting varies by Regulatory Domains
- SSIDs:
 - BSSID support
 - Multi-SSIDs (4 SSIDs)
 - SNMP &MIB
 - v1/v2c/v3 support
 - MIB I/II, Private MIB
- VLAN Tag:
 - Independent VLAN setting can be enable or disable
 - Any packet that enters the Device without a VLAN tag will have a VLAN tag inserted with a PVID (Ethernet Port VID)
- VLAN Pass-through:
 - VLAN pass through over WDS bridge
- Clients Traffic Status:
 - Reports the various main information timely which is required by administrator
- QoS
 - Complaint on IEEE 802.11e standard
- RADIUS Accounting:
 - Help operators to offload 3G to the wi-fi seamlessly

Effective Control and Use

- CLI Comments Support
 - Setting varies by Regulatory Domains
- Distance Control (Ack Timeout)
- Multicast Supported
- Wi-fi Scheduler
 - Set the schedule for rebooting the device

Reinforcement Security

- WEP Encryption-64/128/152 bit
- WPA/WPA2 Enterprise (WPA-EAP using TKIP or AES)
- Hide SSID in beacons
- MAC address filtering
 - Filter up to 50 MACs
- Wireless STA (Client) connection list:
 - Reports the various main information timely which is required by administrator

RF Specification (Aggregated Value)

Channel	Data Rate	Transmit Power (Aggregated, dBm)	Receive Sensitivity (Aggregated, dBm)
802.11b 2.4 GHz	1 Mbps	26.0	-95.0
	2 Mbps	26.0	-95.0
	5.5 Mbps	26.0	-93.0
	11 Mbps	26.0	-93.0
802.11g 2.4 GHz	6 Mbps	26.0	-95.0
	54 Mbps	24.0	-77.0
802.11a 5 GHz	6 Mbps	-	-
	54 Mbps	-	-
802.11n HT20 2.4 GHz	MCS 0 / 8 / 16	26.0	-95.0
	MCS 7 / 15 / 23	22.0	-73.0
802.11n HT40 2.4 GHz	MCS 0 / 8 / 16	26.0	-95.0
	MCS 7 / 15 / 23	22.0	-73.0
802.11n HT20 5GHz	MCS 0 / 8 / 16	-	-
	MCS 7 / 15 / 23	-	-
802.11n HT40 5GHz	MCS 0 / 8 / 16	-	-
	MCS 7 / 15 / 23	-	-
802.11ac VHT20 5GHz	MCS0	-	-
	MCS8	-	-
802.11ac VHT40 5GHz	MCS0	-	-
	MCS9	-	-
802.11ac VHT80 5GHz	MCS0	-	-
	MCS9	-	-

*Maximum performance of the hardware provided. Maximum transmit power is limited by local regulatory.


*The supported frequency band is restricted by local regulatory requirements.

*Transmit power is configured in 1.0dBm increments.

Antenna Specifications (Internal Antenna)

Omnini-Directional Type	2.4GHz	5GHz
Average Antenna Gain	5.0dBi	-
Polarization	Vertical	-
Azimuth Beam-Width	360°	-
Elevation Beam-Width	30°	-
VSWR	1:2.0	-
Dimension	13(Φ)x200(L) mm	-


Radiation Diagram

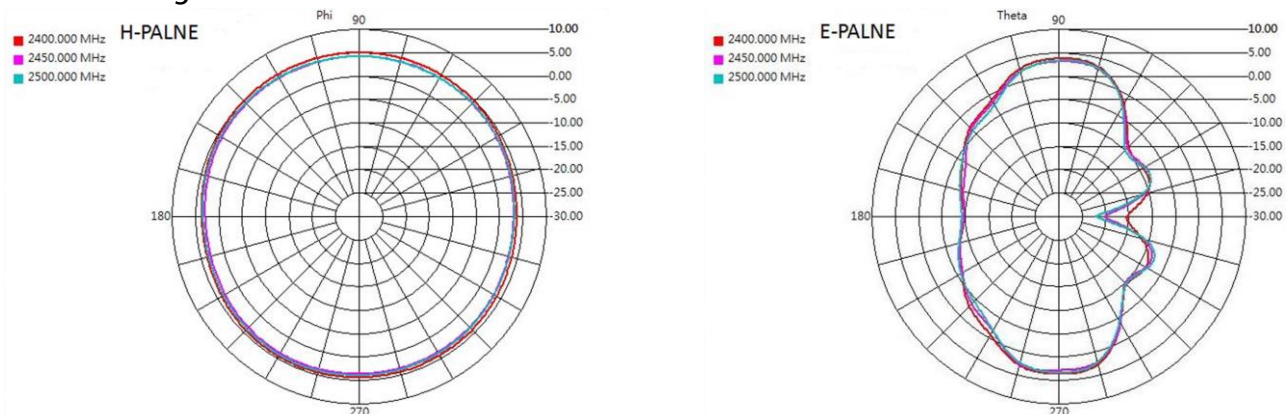

Network Management System - EnGenius Zone Controller

In enhancing the real-time functionality of a network, applying the best network management software tool is necessary. Built-in Network Management System, EZ Controller (EnGenius Zone Controller), provides an intelligent tool for IT manager, installer, and network administrators to configure control, and manage all wireless devices within network from one central location. This application ensures the entire network will optimally operate without troubles, glitches and interruptions.

The growing demand of performance related results from service providers or someone involved in an enterprise, you need to provide a huge platform to make it successful. The robust design of EZ Controller can manage different devices simultaneously and precisely, as well as configure the advanced service for wireless clients.

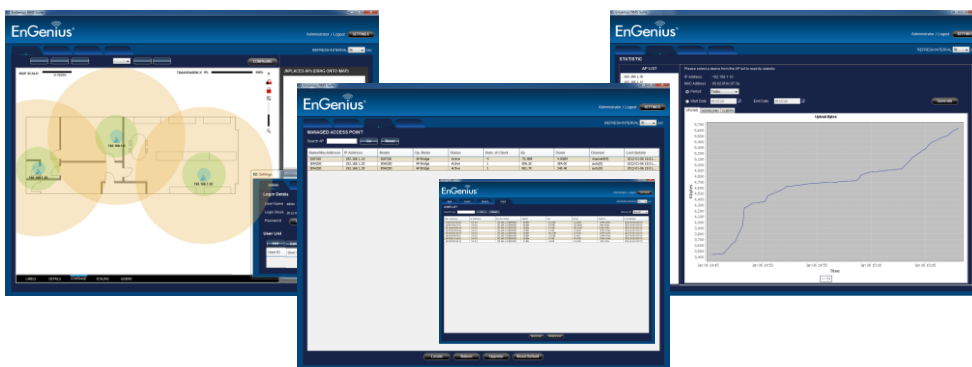

Configure, control and manage EnGenius Enterprise Wireless Devices from one central location.

Features:

- Easy-to-use User Interface
- Optimize network performance
- Eliminate downtime
- Check real-time wireless coverage
- Monitor and control each sheet
- Monitor traffic loads by AP, MAC or IP address
- Sequential firmware upgrades to deployed APs / Bridges
- Import and archive floor-plan maps for radio coverage plotting
- Labels assets by MAC and IP address or user-defined aliases
- Export real-time AP statistics report

An intelligent solution for different business environment



Villa



Campus



Office



Plaza

EnGenius | 1300 725 323
www.engeniustech.com.au

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range can vary depending on many factors including environmental conditions, distance between devices, radio interference in the operating environment, and mix of devices in the network. Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners
Copyright © 2013 EnGenius. All rights reserved.